


REV	DATE	DESCRIPTION	BY	CK
2	04/2026	CAD-STYLE DETAILING / NORMALIZED DATA	JDS	RKM
1	04/2026	ISSUED FOR INTERCONNECTION REVIEW	JDS	RKM



TOPIC	PROPOSED ARRANGEMENT
Settlement / billing metering	TO-owned or TO-approved revenue meters on the 138 kV side with PT/CT sources approved by the TO metering group
Customer metering	Main transformer LV metering, 13.8 kV bus metering, half-feeder metering, emergency plant monitoring, UPS plant monitoring
Time synchronization	GPS-based time source for relay and metering sequence of events
Power factor control	Automatic switching of 13.8 kV capacitor banks to maintain PDI power-factor target
Operating restriction	No leading power-factor operation and no intentional export without prior review and approval

REV	DATE	DESCRIPTION	BY	CK
2	04/2026	CAD-STYLE DETAILING / NORMALIZED DATA	JDS	RKM
1	04/2026	ISSUED FOR INTERCONNECTION REVIEW	JDS	RKM

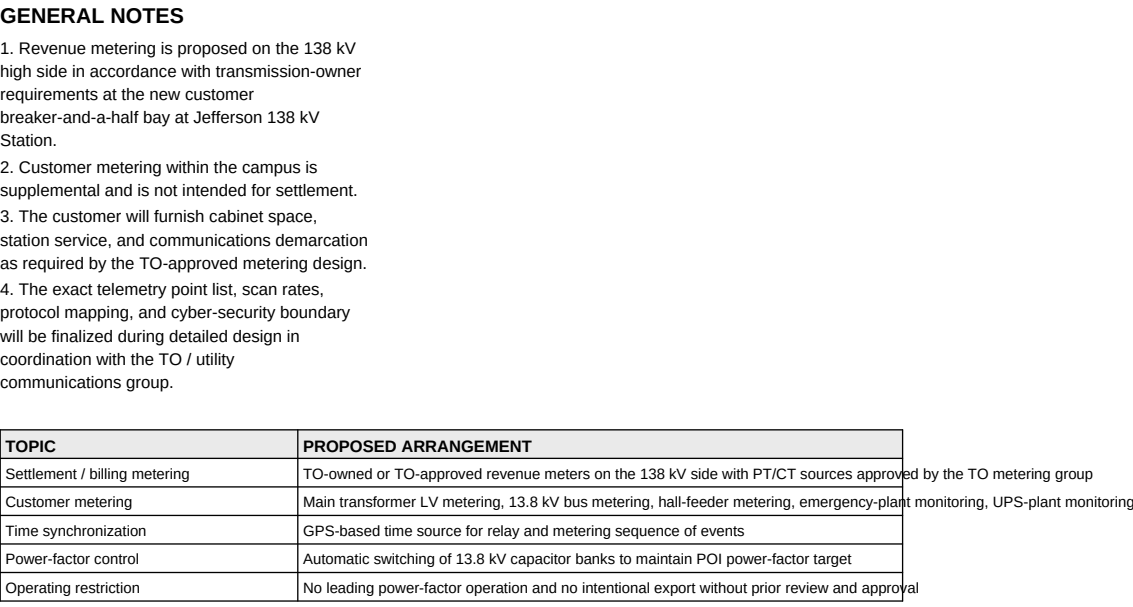